

BASELIFT 6300 / 6310

Wall-mounted or floor-mounted motorised straight worktop lift

BASELIFT 6300/6310 is a straight, motorised worktop lift. Choose between wall-mounted or floor-mounted motors.

Under the worktop, space is left for the knees and legs. Installations under the worktop (motors, water, sewers) can be concealed by telescopic cover panels which gives the kitchen a neat look.

The motors work steplessly and adjust the worktop quickly and quietly to the desired height. The lift is equipped with a reliable safety system that guarantees safe operation without any risk of pinching.

The lift is prepared in the factory to facilitate easy installation.



The front of BASELIFT 6300H/6310H hides the sink bowls and gives a nice front. Installations under the worktop are hidden by cover panels.



BASELIFT 6300H/6310H can be fitted with a drawer at the front.



BASELIFT 6300L/6310L has a 40 mm front, which provides good accessibility for seated work.



The low front of BASELIFT 6300L/6310L means the lift is suitable for hobs.



Functions and advantages

- Motorised, straight worktop lift
- Height-adjustable 70-100 cm above floor (excl. top board)
- The frame depth is adjustable 56-59 cm to fit adjoining cabinet
- The upper part of the lifting system is delivered ready-mounted. The sides are pre-assembled and adjustable side-ways to suit the sink, hob and drawers
- The lifting system is adjustable at an angle to compensate for an inclined wall
- Integrated safety switch
- 10 cm free space under motors for electrical installation and piping. (Applies to wall-mounted model)
- Choose floor-mounted model if there is no stable wall

Standard equipment

- Factory-mounted aluminium system with movable and tiltable brackets
- Wall-mounted or floor-mounted motors
- Safety switch


Recommended additional options

- | | |
|---------------------------|----------------------------|
| - Control button | - Drawer (not 6300L/6310L) |
| - Front | - Rear edge trim |
| - Hose cover/cover panels | - Top board |
| - Sink (not 6300L/6310L) | - Hob |

Useful information

- Fittings for top board and fronts enclosed
- The top board's depth must be 15 mm shallower than adjoining top boards (to provide a gap for tiles and movement)
- Width of the top board = width of the lift
- Sink bowls with a maximum height of 120 mm can be integrated (not 6300L/6310L)
- Electronics and motor system "Plug and Play"
- Width of front = width of lift -4 mm
Height of front: 6300H/6310H = 103 mm, 6300L/6310L = 40 mm
Fittings enclosed
- Cover panels can hide installations under the worktop
2 pcs width = width of lift -10 mm, height 438 mm, thickness 12-20 mm

Supplement with Plus module if you need a lift longer than 240 cm
The division should be as close to the middle as possible for even distribution of the engines.



Specify the location of drawers, sink and hob

The worktop is prepared in the factory. Drawers are mounted and sides assembled to facilitate the final mounting on the spot.

WALL-MOUNTED

6300H



6300L



FLOOR-MOUNTED

6310H



6310L






Specifications

Mounting	Wall or floor
Height adjustment	Motorised, steplessly adjustable 300 mm (700-1000 mm excl. top board)
Speed	30 mm / sec.
Manoeuvring	Recessed mounted button or radio control
Safety	The safety strip is placed under the front edge of the worktop. If anything touches the safety strip, the lifting unit stops
Electricity connection	Plug for 230 V, max 5.0 A
Plumbing connections	Connection is made with flexible hoses
Lifting power	100 kg
IP Class	IP 20
Frame depth	560-590 mm from wall
Front height	40 or 103 mm
Dimensions cover panels	2 pcs, width = width of the lift -10 mm, height 438 mm, thickness 12-20 mm
Width top board	Width = width of the lift
Depth top board	565-630 mm (15 mm shallower than worktops on fixed cabinets)
Gap to the side to wall/adjoining cabinet	5 mm
Gap to wall (for tiling)	15 mm
Tiling	From 700 mm above floor (alternatively all the way down to the floor)
Delivery modules	Ready-mounted worktop incl. safety switch, motors
Fittings enclosed	Bracket for front panels and top board
Material specifications	Aluminium frame
Guarantee	2 years
	CE




Measurement data

(mm)

WALL-MOUNTED: 6300H/6300L

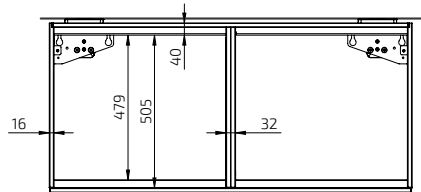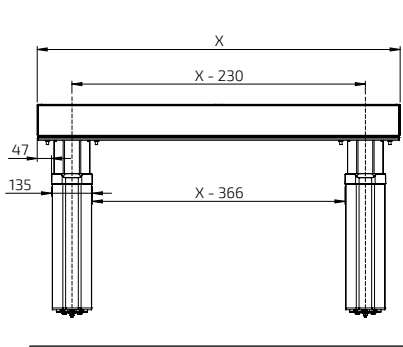


FLOOR-MOUNTED: 6310H/6310L

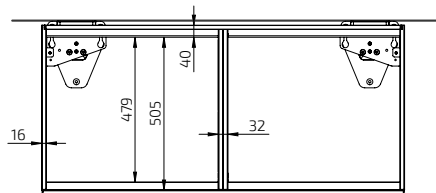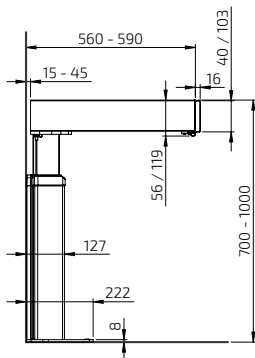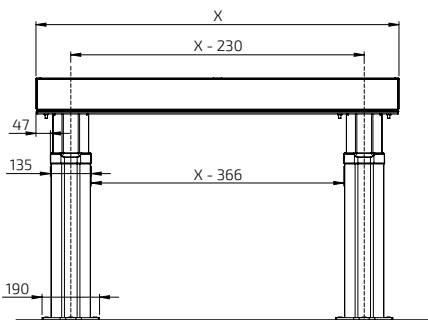

BASELIFT 6300HA


Wall-mounted lifting unit 59.0-100.0 cm width

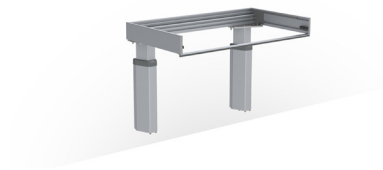

Width (cm)	Art. no.
59.0	6300HA-059
60.0	6300HA-060
69.0	6300HA-069
70.0	6300HA-070
79.0	6300HA-079
80.0	6300HA-080
89.0	6300HA-089
90.0	6300HA-090
99.0	6300HA-099
100.0	6300HA-100

BASELIFT 6300HA

Wall-mounted lifting unit 109.0 - 180.0 cm width

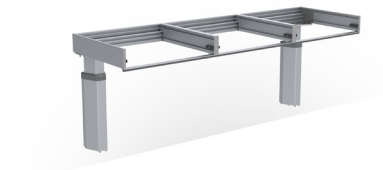

109.0	6300HA-109
110.0	6300HA-110
119.0	6300HA-109
120.0	6300HA-120
129.0	6300HA-109
130.0	6300HA-130
139.0	6300HA-139
140.0	6300HA-140
149.0	6300HA-149
150.0	6300HA-150
159.0	6300HA-159
160.0	6300HA-160
169.0	6300HA-169
170.0	6300HA-170
179.0	6300HA-179
180.0	6300HA-180

BASELIFT 6300HA

Wall-mounted lifting unit 189.0 - 240.0 cm width



189.0	6300HA-189
190.0	6300HA-189
199.0	6300HA-189
200.0	6300HA-200
209.0	6300HA-209
210.0	6300HA-210
219.0	6300HA-219
220.0	6300HA-220
229.0	6300HA-220
230.0	6300HA-230
239.0	6300HA-239
240.0	6300HA-240

Plus module BASELIFT 6306HA

Wall-mounted Plus module 40.0-100.0 cm width



40.0	6306HA-040
50.0	6306HA-050
60.0	6306HA-060
70.0	6306HA-070
80.0	6306HA-080
90.0	6306HA-090
100.0	6306HA-100

Plus module BASELIFT 6306HA

Wall-mounted Plus module 110.0-180.0 cm width



110.0	6306HA-110
120.0	6306HA-120
130.0	6306HA-130
140.0	6306HA-140
150.0	6306HA-150
160.0	6306HA-160
170.0	6306HA-170
180.0	6306HA-180

Plus module BASELIFT 6306HA

Wall-mounted Plusmodule 190.0-240.0 cm width



190.0	6306HA-190
200.0	6306HA-200
210.0	6306HA-210
220.0	6306HA-220
230.0	6306HA-230
240.0	6306HA-240

BASELIFT 6310HA

Floor-mounted lifting unit 59.0-100.0 cm width



Width (cm)	Art. no.
59.0	6310HA-059
60.0	6310HA-060
69.0	6310HA-069
70.0	6310HA-070
79.0	6310HA-079
80.0	6310HA-080
89.0	6310HA-089
90.0	6310HA-090
99.0	6310HA-099
100.0	6310HA-100

BASELIFT 6310HA

Floor-mounted lifting unit 109.0 - 180.0 cm width



109.0	6310HA-109
110.0	6310HA-110
119.0	6310HA-109
120.0	6310HA-120
129.0	6310HA-109
130.0	6310HA-130
139.0	6310HA-139
140.0	6310HA-140
149.0	6310HA-149
150.0	6310HA-140
159.0	6310HA-149
160.0	6310HA-160
169.0	6310HA-149
170.0	6310HA-170
179.0	6310HA-179
180.0	6310HA-170

BASELIFT 6310HA

Floor-mounted lifting unit 189.0 - 240.0 cm width



189.0	6310HA-189
190.0	6310HA-190
199.0	6310HA-199
200.0	6310HA-200
209.0	6310HA-209
210.0	6310HA-210
219.0	6310HA-219
220.0	6310HA-220
229.0	6310HA-219
230.0	6310HA-230
239.0	6310HA-239
240.0	6310HA-240

Plus module BASELIFT 6316HA

Floor-mounted Plus module 40.0-100.0 cm width



40.0	6316HA-040
50.0	6316HA-050
60.0	6316HA-060
70.0	6316HA-070
80.0	6316HA-080
90.0	6316HA-090
100.0	6316HA-100

Plus module BASELIFT 6316HA

Floor-mounted Plus module 110.0-180.0 cm width



110.0	6316HA-110
120.0	6316HA-120
130.0	6316HA-130
140.0	6316HA-140
150.0	6316HA-150
160.0	6316HA-160
170.0	6316HA-170
180.0	6316HA-180

Plus module BASELIFT 6316HA

Floor-mounted Plus module 190.0-240.0 cm width





190.0	6316HA-190
200.0	6316HA-200
210.0	6316HA-210
220.0	6316HA-220
230.0	6316HA-230
240.0	6316HA-240

ACCESSORIES

	Control button in ALU-design Wired, for recessed mounting Dimensions: 82 x 82 x 17 mm	61320
	Control button, Mini Wired, for recessed mounting Diameter: 20 mm	61318
 Radio control for 1 lift  Radio control for 2-5 lifts	Radio control - Hand control Dimensions: 38 x 110 x 10 mm For one lift For two lifts For three lifts For four lifts For five lifts	61385 61387 61388 61389 61390
	Multi-compartment frame, ALU-design Collects power socket, power switch or control buttons in a multi-compartment frame. Two-compartment frame: 153 x 82 x 9 mm Three-compartment frame: 225 x 82 x 9 mm	61352 61353
	Socket, ALU-design Earthed socket 230 V with flap cover. Dimensions: 82 x 82 x 17 mm Only Europe	61330
	Power switch, ALU-design For lighting, for example. The button has a sign for optional marking. Dimensions: 82 x 82 x 17 mm	61331
	Safety lock Prevents unauthorised use. Dimensions: 23 x 9 mm	61360
	Front, white-lacquered aluminium Replace xxx with cm when ordering. Example, 385H-040-01 for 40.0 cm Lacquered aluminium, white RAL 9003 Height: 103 mm Optional length, 20.0-340.0 cm	385H-xxx-01
	Front, anodised aluminium Replace xxx with cm when ordering. Example, 385H-040-06 for 40.0 cm Anodised aluminium Height: 103 mm Optional length, 20.0-340.0 cm	385H-xxx-06
	Integrated drawer with full extension and soft-close or push-to-open function Depth: 470 mm, height: 85 mm Colour: Anthracite (RAL 9004) 30.0 cm 40.0 cm 50.0 cm 60.0 cm 80.0 cm 30.0 cm - Push-to-open function 40.0 cm - Push-to-open function 50.0 cm - Push-to-open function 60.0 cm - Push-to-open function 80.0 cm - Push-to-open function	465H-030 465H-040 465H-050 465H-060 465H-080 466H-030 466H-040 466H-050 466H-060 466H-080

BASELIFT 6300H/6310H

	Cutlery compartment <table><tr><td>Fits 30.0 cm wide drawer</td><td>463-030</td></tr><tr><td>Fits 40.0 cm wide drawer</td><td>463-040</td></tr><tr><td>Fits 50.0 cm wide drawer</td><td>463-050</td></tr><tr><td>Fits 60.0 cm wide drawer</td><td>463-060</td></tr><tr><td>Fits 80.0 cm wide drawer</td><td>463-080</td></tr></table>	Fits 30.0 cm wide drawer	463-030	Fits 40.0 cm wide drawer	463-040	Fits 50.0 cm wide drawer	463-050	Fits 60.0 cm wide drawer	463-060	Fits 80.0 cm wide drawer	463-080	
Fits 30.0 cm wide drawer	463-030											
Fits 40.0 cm wide drawer	463-040											
Fits 50.0 cm wide drawer	463-050											
Fits 60.0 cm wide drawer	463-060											
Fits 80.0 cm wide drawer	463-080											
	Safety strip Used if pinch protection is desired on the gable end (by an open side). Length: 370 mm, Height: 10 mm	61430										
	Safety panel, short end Used when the worktop lift's underside passes over adjoining furnishings. Height: 263 mm, Depth: 400 mm For a worktop lift with cover panels <table><tr><td>Left</td><td>61442</td></tr><tr><td>Right</td><td>61443</td></tr></table>	Left	61442	Right	61443							
Left	61442											
Right	61443											
	Safety panel, short end Used when the worktop lift's underside passes over adjoining furnishings. Height: 263 mm, Depth: 545 mm For a worktop lift without cover panels <table><tr><td>Left</td><td>61444</td></tr><tr><td>Right</td><td>61445</td></tr></table>	Left	61444	Right	61445							
Left	61444											
Right	61445											
	Hob cover under worktop lift Provides a smooth underside. Used under the hob. White-lacquered metal RAL 9003 <table><tr><td>60.0 cm</td><td>6266-060</td></tr><tr><td>70.0 cm</td><td>6266-070</td></tr><tr><td>80.0 cm</td><td>6266-080</td></tr><tr><td>90.0 cm</td><td>6266-090</td></tr><tr><td>100.0 cm</td><td>6266-100</td></tr></table>	60.0 cm	6266-060	70.0 cm	6266-070	80.0 cm	6266-080	90.0 cm	6266-090	100.0 cm	6266-100	
60.0 cm	6266-060											
70.0 cm	6266-070											
80.0 cm	6266-080											
90.0 cm	6266-090											
100.0 cm	6266-100											
	Cover panels Used to cover installations under the worktop. 12 mm white melamine, 2 pcs height 438 mm 2 pcs are required for lengths over 2400 mm	6260-240										
	Fittings set for cover panels Used to mount cover panels that conceal installations under the worktop. Colour: Alu-grey RAL 9006 2 pcs are required for lengths over 2400 mm	6260-005										
 	Hose cover The hose cover is mounted anywhere under the worktop, (next to motors, if applicable) to provide a neat coverage of hoses when the cover panels are not in use. Fittings are included. Width: 410 mm, Depth: 200 mm <table><tr><td>White plastic</td><td>61504-01</td></tr><tr><td>Grey plastic</td><td>61504-06</td></tr></table>	White plastic	61504-01	Grey plastic	61504-06							
White plastic	61504-01											
Grey plastic	61504-06											
	Rear edge trim in aluminium for top board Mounted behind top board. Brushed aluminium Height above top board: 20 mm Thickness behind top board: 3 mm (per metre)	6943-06										
	Height-adjustment kit Used to change stroke after installation. <i>Contains programming box and memory adapter.</i>	61400										

BASELIFT 6300LA

Wall-mounted lifting unit 59.0-100.0 cm width



Width (cm)	Art. no.
59.0	6300LA-059
60.0	6300LA-060
69.0	6300LA-069
70.0	6300LA-070
79.0	6300LA-079
80.0	6300LA-080
89.0	6300LA-089
90.0	6300LA-090
99.0	6300LA-099
100.0	6300LA-100

BASELIFT 6300LA

Wall-mounted lifting unit 109.0 - 180.0 cm width



109.0	6300LA-109
110.0	6300LA-110
119.0	6300LA-119
120.0	6300LA-120
129.0	6300LA-129
130.0	6300LA-130
139.0	6300LA-139
140.0	6300LA-140
149.0	6300LA-149
150.0	6300LA-150
159.0	6300LA-159
160.0	6300LA-160
169.0	6300LA-169
170.0	6300LA-170
179.0	6300LA-179
180.0	6300LA-180

BASELIFT 6300LA

Wall-mounted lifting unit 189.0 - 240.0 cm width



189.0	6300LA-189
190.0	6300LA-190
199.0	6300LA-199
200.0	6300LA-200
209.0	6300LA-209
210.0	6300LA-210
219.0	6300LA-219
220.0	6300LA-220
229.0	6300LA-229
230.0	6300LA-230
239.0	6300LA-239
240.0	6300LA-240

Plus module BASELIFT 6306LA

Wall-mounted Plus module 40.0-100.0 cm width



40.0	6306LA-040
50.0	6306LA-050
60.0	6306LA-060
70.0	6306LA-070
80.0	6306LA-080
90.0	6306LA-090
100.0	6306LA-100

Plus module BASELIFT 6306LA

Wall-mounted Plus module 110.0-180.0 cm width



110.0	6306LA-110
120.0	6306LA-120
130.0	6306LA-130
140.0	6306LA-140
150.0	6306LA-150
160.0	6306LA-160
170.0	6306LA-170
180.0	6306LA-180

Plus module BASELIFT 6306LA

Wall-mounted Plus module 190.0-240.0 cm width



190.0	6306LA-190
200.0	6306LA-200
210.0	6306LA-210
220.0	6306LA-220
230.0	6306LA-230
240.0	6306LA-240

BASELIFT 6310LA

Floor-mounted lifting unit 59.0-100.0 cm width



Width (cm)	Art. no.
59.0	6310LA-059
60.0	6310LA-060
69.0	6310LA-069
70.0	6310LA-070
79.0	6310LA-079
80.0	6310LA-080
89.0	6310LA-089
90.0	6310LA-090
99.0	6310LA-099
100.0	6310LA-100

BASELIFT 6310LA

Floor-mounted lifting unit 109.0 - 180.0 cm width



109.0	6310LA-109
110.0	6310LA-110
119.0	6310LA-119
120.0	6310LA-120
129.0	6310LA-129
130.0	6310LA-130
139.0	6310LA-139
140.0	6310LA-140
149.0	6310LA-149
150.0	6310LA-150
159.0	6310LA-159
160.0	6310LA-160
169.0	6310LA-169
170.0	6310LA-170
179.0	6310LA-179
180.0	6310LA-180

BASELIFT 6310LA

Floor-mounted lifting unit 189.0 - 240.0 cm width



189.0	6310LA-189
190.0	6310LA-190
199.0	6310LA-199
200.0	6310LA-200
209.0	6310LA-209
210.0	6310LA-210
219.0	6310LA-219
220.0	6310LA-220
229.0	6310LA-229
230.0	6310LA-230
239.0	6310LA-239
240.0	6310LA-240

Plus module BASELIFT 6316LA

Floor-mounted Plus module 40.0-100.0 cm width



40.0	6316LA-040
50.0	6316LA-050
60.0	6316LA-060
70.0	6316LA-070
80.0	6316LA-080
90.0	6316LA-090
100.0	6316LA-100

Plus module BASELIFT 6316LA

Floor-mounted Plus module 110.0-180.0 cm width




110.0	6316LA-110
120.0	6316LA-120
130.0	6316LA-130
140.0	6316LA-140
150.0	6316LA-150
160.0	6316LA-160
170.0	6316LA-170
180.0	6316LA-180



Plus module BASELIFT 6316LA

Floor-mounted Plus module 190.0-240.0 cm width



190.0	6316LA-190
200.0	6316LA-200
210.0	6316LA-210
220.0	6316LA-220
230.0	6316LA-230
240.0	6316LA-240

	Control button, Mini Wired, for recessed mounting Diameter: 20 mm 61318
 Radio control for 1 lift Radio control for 2-5 lifts	Radio control - Hand control Dimensions: 38 x 110 x 10 mm For one lift 61385 For two lifts 61387 For three lifts 61388 For four lifts 61389 For five lifts 61390
	Safety lock Prevents unauthorised use. Dimensions: 23 x 9 mm 61360
	Front, white-lacquered aluminium Replace xxx with cm when ordering. Example, 385L-040-01 for 40.0 cm Lacquered aluminium, white RAL 9003 Height: 40 mm Optional length, 20.0-340.0 cm 385L-xxx-01
	Front, anodised aluminium Replace xxx with cm when ordering. Example, 385L-040-06 for 40.0 cm Anodised aluminium Height: 40 mm Optional length, 20.0-340.0 cm 385L-XXX-06

	Safety strip Used if pinch protection is desired on the gable end (by an open side). Length: 370 mm Height: 10 mm 61430
	Safety panel, short end Used when the worktop lift's underside passes over adjoining interior fittings. Height: 263 mm, Depth: 400 mm For a worktop lift with cover panels Left 61442 Right 61443
	Safety panel, short end Used when the worktop lift's underside passes over adjoining furnishings. Height: 263 mm, Depth: 545 mm For a worktop lift without cover panels Left 61444 Right 61445
	Hob cover under worktop lift Provides a smooth underside. Used under the hob. White-lacquered metal RAL 9003 60.0 cm 6266-060 70.0 cm 6266-070 80.0 cm 6266-080 90.0 cm 6266-090 100.0 cm 6266-100
	Cover panels Used to cover installations under the worktop. Length is adapted to worktop lift's length. 12 mm white melamine, 2 pcs height 438 mm 2 pcs are required for lengths over 2400 mm 6260-240
	Fittings set for cover panels Used to mount cover panels that conceal installations under the worktop. Colour: Alu-grey RAL 9006 2 pcs are required for lengths over 2400 mm 6260-005
	Rear edge trim in aluminium for top board Mounted behind top board. Brushed aluminium Height above top board: 20 mm Thickness behind top board: 3 mm (per metre) 6943-06
	Height-adjustment kit Used to change stroke after installation. Contains programming box and memory adapter. 61400