

Basicline 406

Gas strut operated height-adjustable washbasins

- Width 60 cm
- Manual adjustment with gas spring in intervals of 12 mm
- Practical countertop behind the washbasin
- Free space below the unit for plumbing connections





406-11-05

Page 54



- Overall depth 55.5 cm
- Compact washbasin for children or confined spaces

406-01-05

Page 55



- Overall depth 60.0 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

406-03-05

Page 56



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

406-10-05

Page 57



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

406-15-05

Page 58



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages

- Legroom under the washbasin, 555 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment

- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses


Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	555 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	555 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
406-11-05	BASICLINE 406-11-05 - incl. single lever mixer with 150 mm lever



(mm)

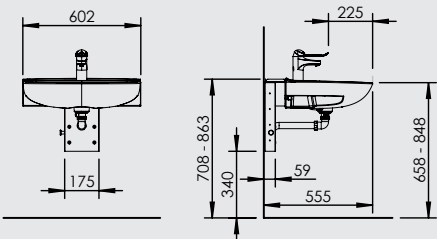



Functions and advantages

- Legroom under the washbasin, 600 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses


Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	600 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	600 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
 406-01-05	BASICLINE 406-01-05 - incl. single lever mixer with 150 mm lever

(mm)

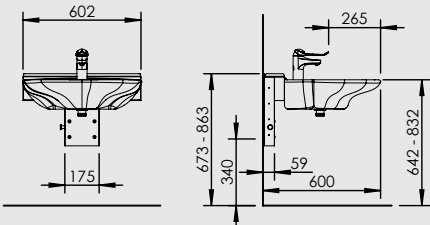



Functions and advantages

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

Standard equipment

- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses


Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	660 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	660 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
406-03-05	BASICLINE 406-03-05 - incl. single lever mixer with 150 mm lever



(mm)

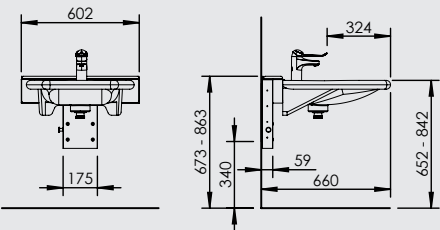



Functions and advantages

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment


- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	660 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	660 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 406-10-05	BASICLINE 406-10-05 - incl. single lever mixer with 150 mm lever

(mm)

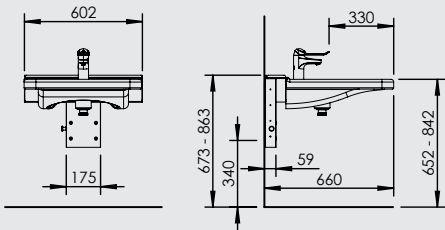



Functions and advantages

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

Standard equipment


- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	660 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	660 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 406-15-05	BASICLINE 406-15-05 - incl. single lever mixer with 150 mm lever

(mm)

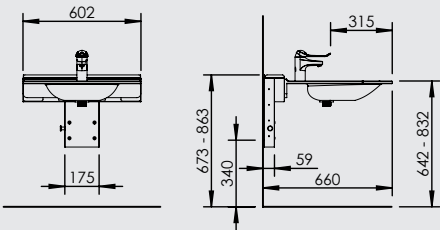



Functions and advantages

- Washbasin bracket optional basin with bolt installation centre-to-centre 280 mm or 350 mm

Standard equipment

- Washbasin bracket adjustable with gas spring
- Installation bolts for the washbasin

Recommended options

- Washbasin, bolt installation centre-to-centre 280 mm
- Mixer
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Suitable basins	Max. weight: 12-18 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin with bolt installation centre-to-centre 280 mm or 350 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
406-1.	BASICLINE 406-1 - Excl. water hoses and drain hose

Washbasin



Mixer



Hoses



(mm)

