


Basicline 401

Manual height-adjustable washbasin module with mirror and lighting

- Width 60 cm
- Manual adjustment in intervals of 50 mm
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections



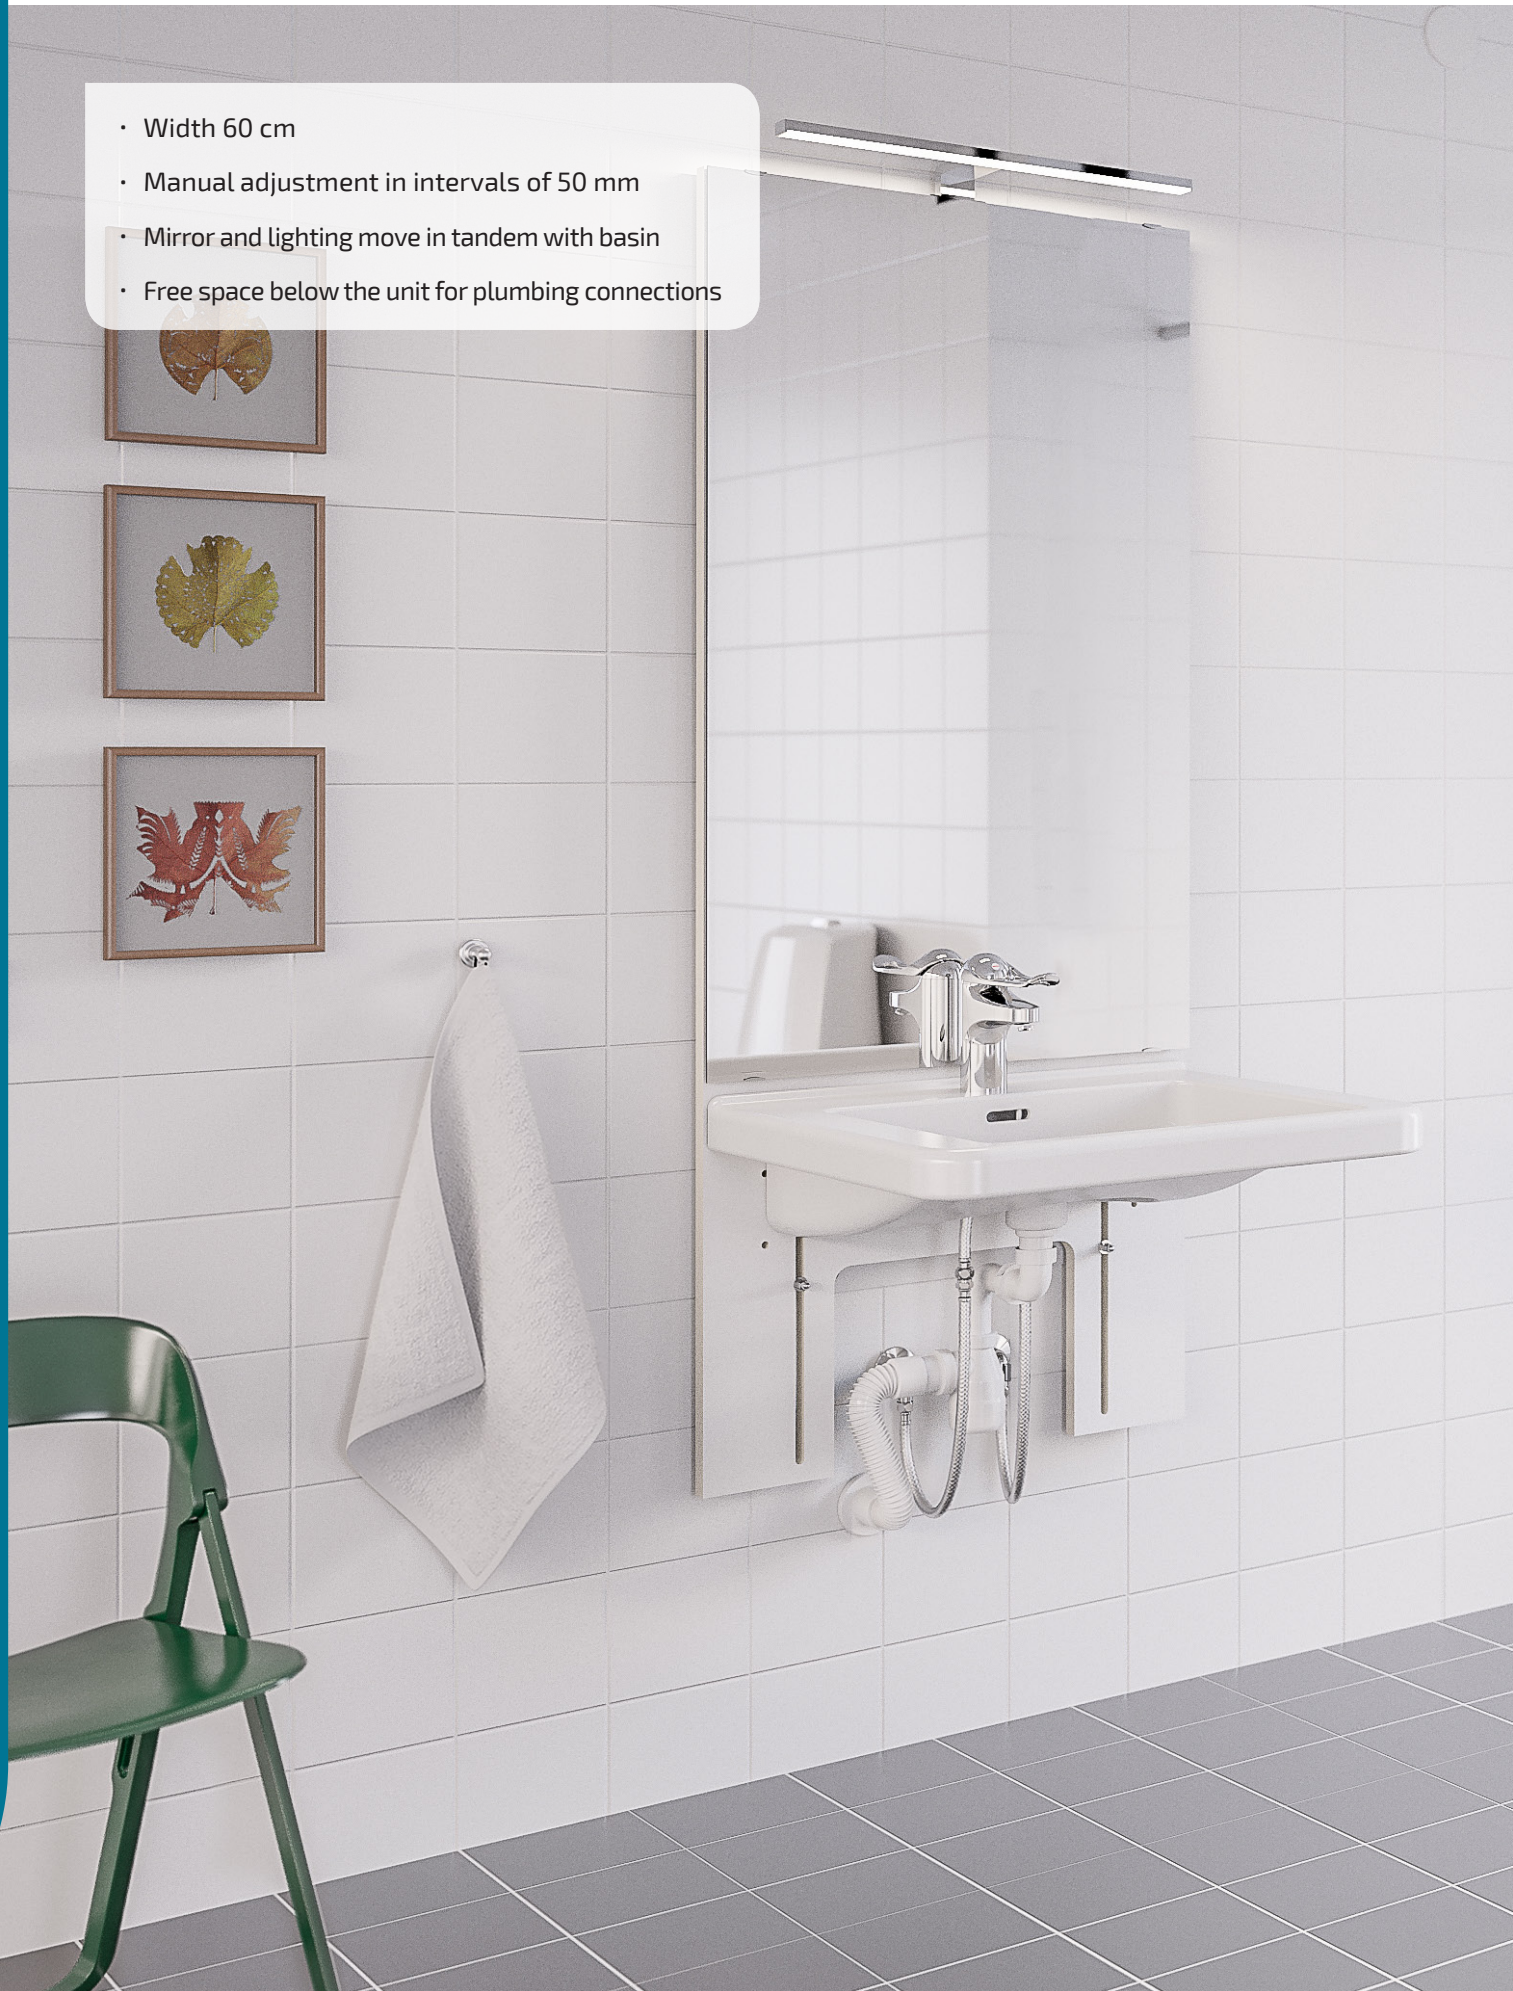

401-11-05


Page 38



- Overall depth 48.2 cm
- Compact washbasin for children or confined spaces

401-01-05


Page 39



- Overall depth 52.7 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

401-03-05

Page 40



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

401-10-05

Page 41



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

401-15-05

Page 42



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment

- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock


Specifications


Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	482 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	482 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
401-11-05	BASICLINE 401-11-05 - incl. single lever mixer with 150 mm lever



(mm)

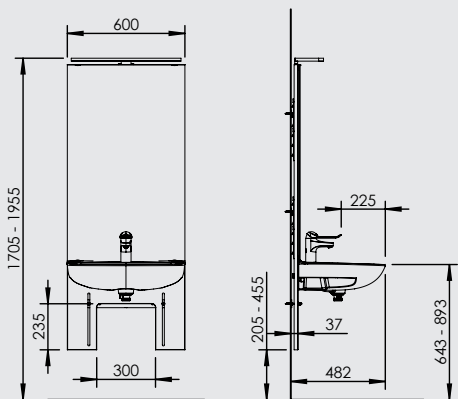

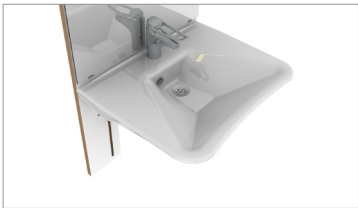

Art. no.	Designation
401-01-05	BASICLINE 401-01-05 - incl. single lever mixer with 150 mm lever



Functions and advantages


- Legroom under the washbasin, 527 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	527 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	527 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

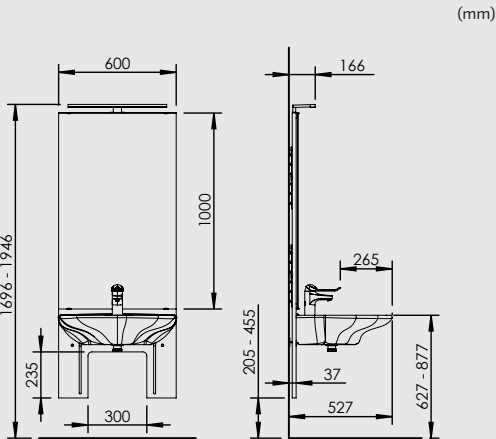



Art. no.	Designation
401-03-05	BASICLINE 401-03-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides


Standard equipment

- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	587 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	587 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000x600x4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

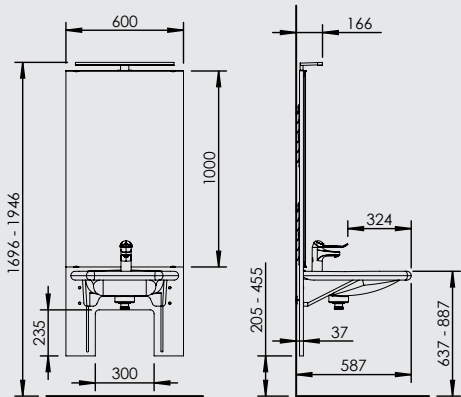



Art. no.	Designation
401-10-05	BASICLINE 401-10-05 - incl. single lever mixer with 150 mm lever

Functions and advantages


- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment

- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	587 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	587 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

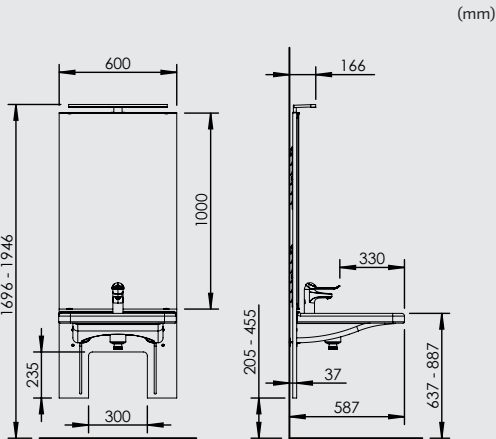



Art. no.	Designation
401-15-05	BASICLINE 401-15-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots


Standard equipment

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	587 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	587 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

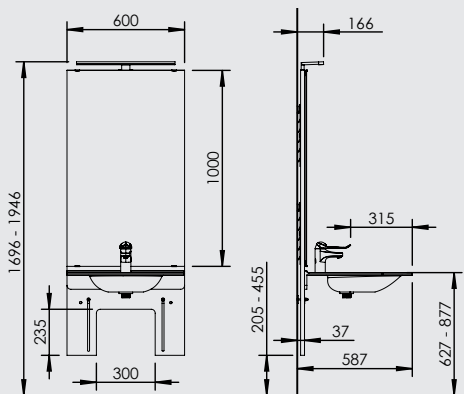



Functions and advantages

- Washbasin module optional basin

Standard equipment

- Mirror and lighting
- Track safety lock

Recommended options

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap


Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Suitable basins	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin with bolt installation centre-to-centre 280 mm or 350 mm
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
401-1.	BASICLINE 401-1 - Excl. water hoses and drain hose



(mm)

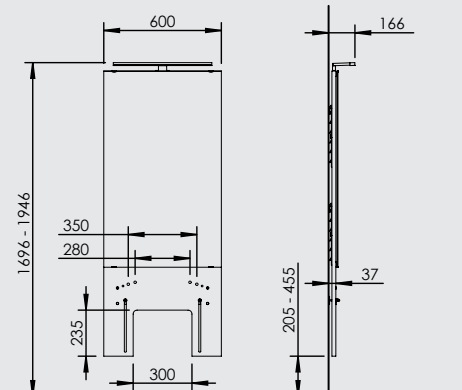

Washbasin



Page 62

Mixer



Page 65

Hoses



Page 68