


SIDELIFT 6400

Floor-mounted, motorised, straight worktop lift with side motors

SIDELIFT 6400 is a straight, motorised worktop lift. Cabinets can be hung under the entire lift or under certain sections. Powerful motors (400 kg lifting power) are located on the short sides.

The motors work steplessly and adjust the worktop quickly and quietly to the desired height. The lift is equipped with a reliable safety system that guarantees safe operation without any risk of pinching. The lift is prepared in the factory to facilitate easy installation.

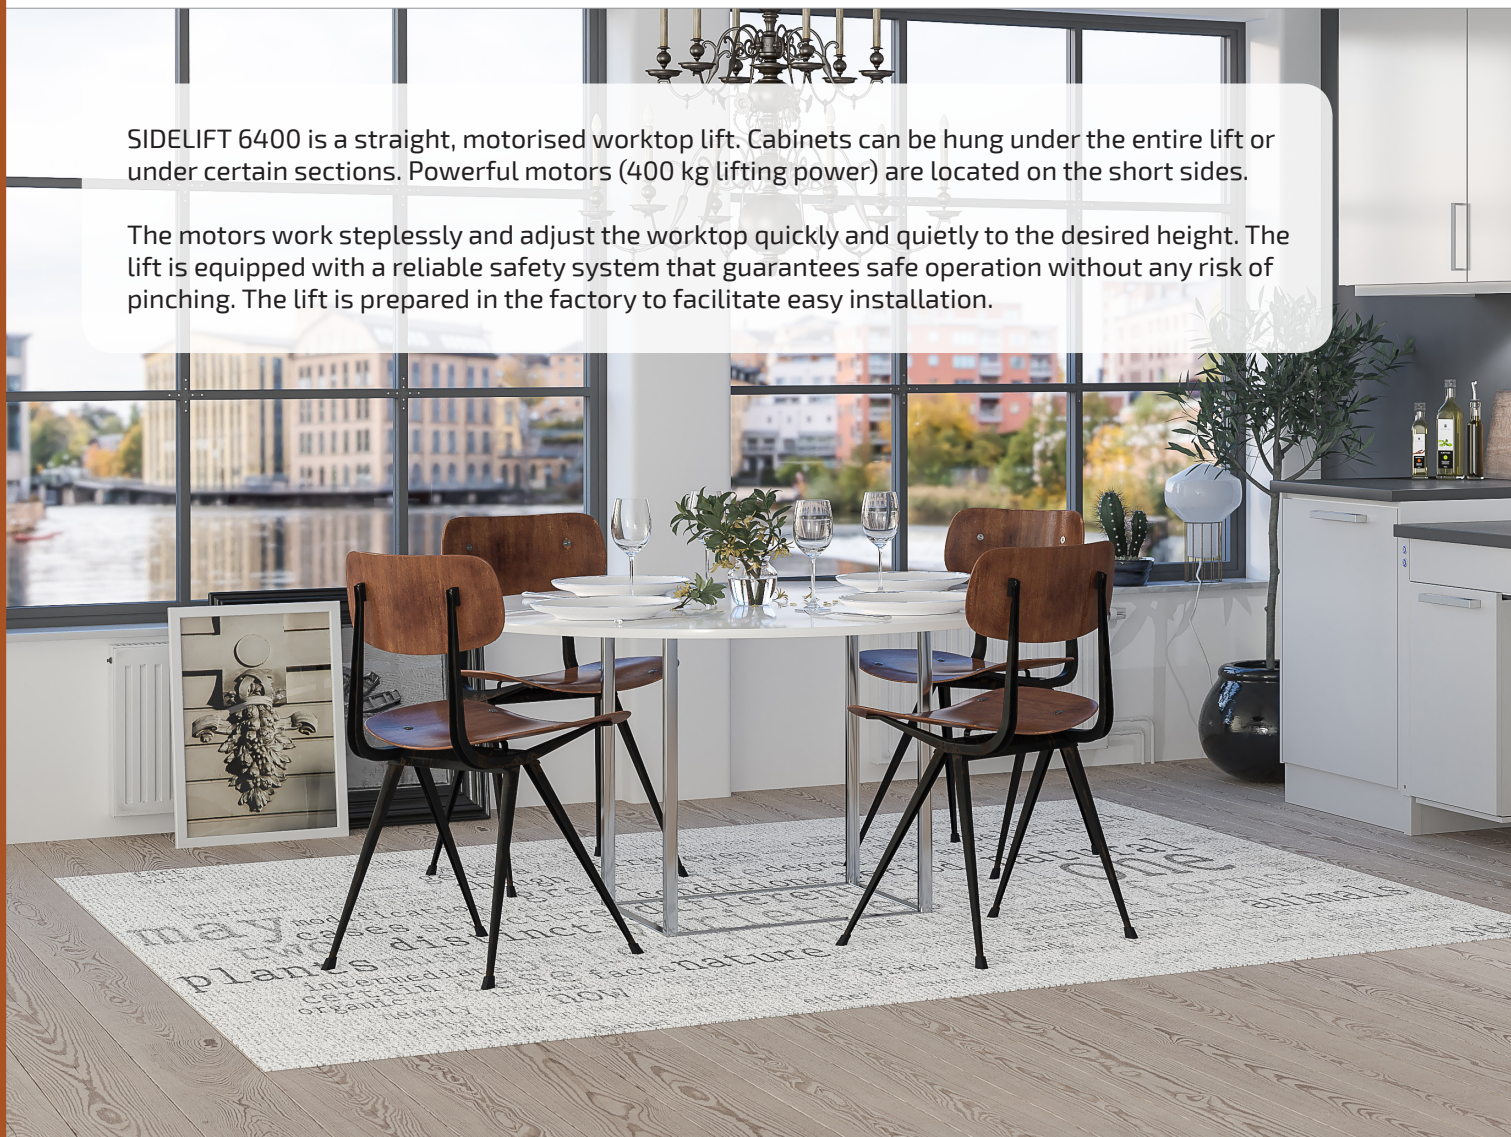

SIDELIFT creates an ergonomic kitchen worktop which everyone can use comfortably. The motors take up minimal space and there is ample room for storage in the hanging cabinets.



If needs change, the cabinets can easily be removed to provide space for work done when sitting down. The cabinets can be re-mounted just as easily.



Functions and advantages

- Motorised, straight worktop lift with side motors
- Cabinets can be hung under the entire worktop or under certain parts
- Height-adjustable 70-100 cm above the floor (excl. top board)
- 400 kg lifting power
- Safety switch under cabinets and where there are spaces for knees
- Control button, Mini located in motor units

Standard equipment


- Factory-mounted aluminium system
- Floor-mounted motors
- Control button

Recommended additional options

- Hanging cabinets
- Front
- Safety plates (under hanging cabinets)
- Top board
- Sink
- Hob

Useful information

- Fittings for top board enclosed
- Width of the top board = width of the lift
- The top board's depth must be 15 mm shallower than adjoining top boards (to provide a gap for tiles and movement)
- Sink bowls with a maximum height of 120 mm can be integrated
- Electronics and motor system "Plug and Play"
- Width of front = width of lift - 94 mm
Height of front = 103 mm
Fittings enclosed
- Cover panels can hide installations under the worktop
Width = width of lift - 410 mm
2 pcs height 438 mm, thickness 12-20 mm

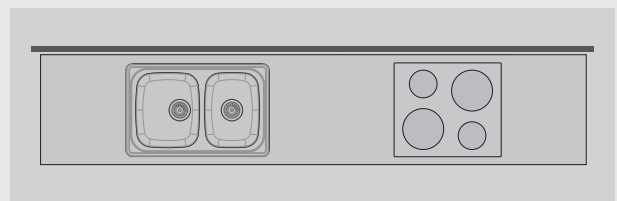

Specify the position of cabinets, sink and hob

The worktop is prepared in the factory to facilitate final assembly on site.






Specifications

Mounting	Floor
Height adjustment	Motorised, steplessly adjustable 300 mm (700-1000 mm excl. top board)
Speed	20 mm / sec.
Manoeuvring	Control button, Mini is located in the motor units (left and right side)
Safety	There are safety switches under the cabinet and under the front in spaces for knees. The function of the safety switch is to stop the movement if it comes into contact with any object.
Electricity connection	Plug for 230 V, max 5,0 A
Plumbing connections	Connection is made with flexible hoses
Lifting power	400 kg
IP Class	IP 20
Frame depth	561 mm from wall
Front height	103 mm
Dimensions cover panels	Width = Width of lift -410 mm 2 pcs Height 438 mm Thickness 12 mm
Width top board	Width = width of the lift
Depth top board	15 mm shallower than worktops on fixed cabinets
Gap to the side to wall/adjoining cabinet	5 mm
Gap to wall (for tiling)	15 mm
Tiling	From 700 mm above floor (alternatively all the way down to the floor)
Delivery modules	1 package with motor units. 1 package with length-dependent beams
Material specifications	Motor units in lacquered steel (S235JRG2). Aluminium beams
Guarantee	2 years
	CE

Measurement data

(mm)

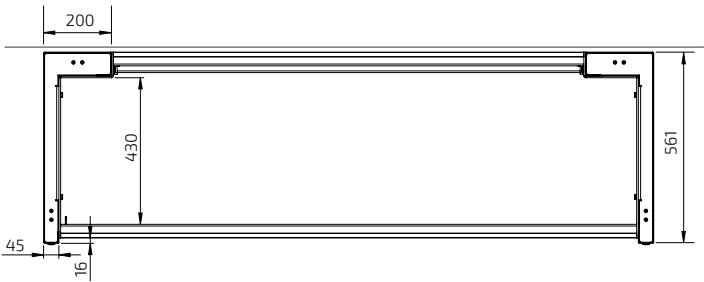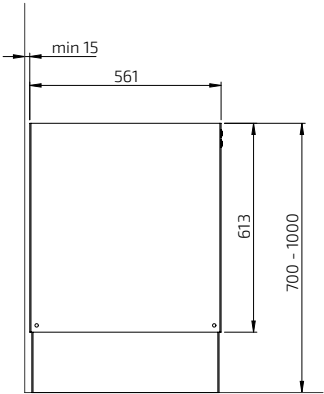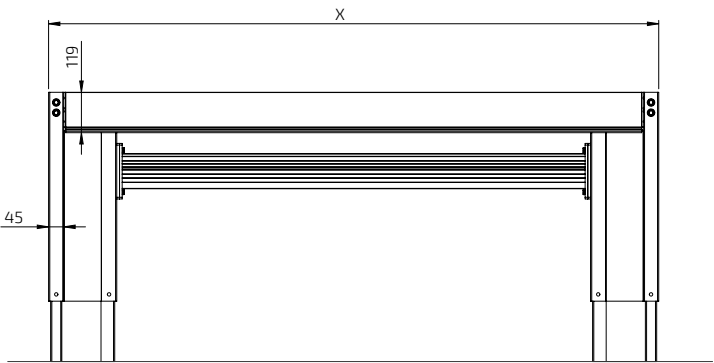

SIDELIFT 6400H



With a SIDELIFT in your kitchen, the kitchen of the future is already here! An ergonomic kitchen worktop with generous storage space that can easily be height-adjusted.



If your needs change, the cabinets can easily be removed to provide space for work done when sitting down. The cabinets can be re-mounted just as easily.



Safety systems, in the form of safety plates under cabinets and safety strips where there are spaces for knees, stop all movement if any object comes in contact with the switches.



Inset sink with shallow sink bowl and hob can be integrated.



The hanging cabinets are equipped with two fully-extendable, soft-close drawers.



Hanging cabinets with waste sorting bins are available in widths 40-80 cm.

SIDELIFT 6400H

- White RAL 9003

- Incl. control button Mini in the motor units (left and right side)

- Supplement with front that conceals the lifting frame



Width (cm)	Art. no.	Width (cm)	Art. no.
99.0	6400HA-099-01	219.0	6400HA-219-01
109.0	6400HA-109-01	229.0	6400HA-229-01
119.0	6400HA-119-01	239.0	6400HA-239-01
129.0	6400HA-129-01	249.0	6400HA-249-01
139.0	6400HA-139-01	259.0	6400HA-259-01
149.0	6400HA-149-01	269.0	6400HA-269-01
159.0	6400HA-159-01	279.0	6400HA-279-01
169.0	6400HA-169-01	289.0	6400HA-289-01
179.0	6400HA-179-01	299.0	6400HA-299-01
189.0	6400HA-189-01	309.0	6400HA-309-01
199.0	6400HA-199-01	319.0	6400HA-319-01
209.0	6400HA-209-01	329.0	6400HA-329-01

SIDELIFT 6400H

- Anthracite RAL 9004

- Incl. manoeuvre button Mini in the motor units (left and right side)

- Supplement with front that conceals the lifting frame



99.0	6400HA-099-07	219.0	6400HA-219-07
109.0	6400HA-109-07	229.0	6400HA-229-07
119.0	6400HA-119-07	239.0	6400HA-239-07
129.0	6400HA-129-07	249.0	6400HA-249-07
139.0	6400HA-139-07	259.0	6400HA-259-07
149.0	6400HA-149-07	269.0	6400HA-269-07
159.0	6400HA-159-07	279.0	6400HA-279-07
169.0	6400HA-169-07	289.0	6400HA-289-07
179.0	6400HA-179-07	299.0	6400HA-299-07
189.0	6400HA-189-07	309.0	6400HA-309-07
199.0	6400HA-199-07	319.0	6400HA-319-07
209.0	6400HA-209-07	329.0	6400HA-329-07

SIDELIFT 6400H

- Black RAL 9005

- Incl. manoeuvre button Mini in the motor units (left and right side)

- Supplement with front panel that conceals the lifting frame




99.0	6400HA-099-10	219.0	6400HA-219-10
109.0	6400HA-109-10	229.0	6400HA-229-10
119.0	6400HA-119-10	239.0	6400HA-239-10
129.0	6400HA-129-10	249.0	6400HA-249-10
139.0	6400HA-139-10	259.0	6400HA-259-10
149.0	6400HA-149-10	269.0	6400HA-269-10
159.0	6400HA-159-10	279.0	6400HA-279-10
169.0	6400HA-169-10	289.0	6400HA-289-10
179.0	6400HA-179-10	299.0	6400HA-299-10
189.0	6400HA-189-10	309.0	6400HA-309-10
199.0	6400HA-199-10	319.0	6400HA-319-10
209.0	6400HA-209-10	329.0	6400HA-329-10

Recommended accessories




Front that conceals the lifting frame



Hanging cabinets



Safety plates (under cabinets)



Cover panels



**Hanging cabinet with drawers**

The cabinet has a large drawer and a smaller inner drawer for cutlery and utensils.

Fully extendable with soft-close.
Frame height 510 mm
Frame depth: 470 mm

Frame in white melamine.
White-lacquered door (NCS 0500-N)

30.0 cm	760-030-01
40.0 cm	760-040-01
50.0 cm	760-050-01
60.0 cm	760-060-01
70.0 cm	760-070-01
80.0 cm	760-080-01

**Hanging cabinet with waste sorting bins, 40 cm**

The cabinet is fitted with 2 waste bins. The upper part has an inner drawer for cutlery and utensils.

Fully extendable with soft-close.
Frame height 510 mm
Frame depth: 470 mm

Waste bins (litre):
1 pc 17 litre, 1 pc 11 litre

Frame in white melamine.
White-lacquered door (NCS 0500-N)

761-040-01

**Hanging cabinet with waste sorting bins, 60 cm**


The cabinet is fitted with 4 waste bins. The upper part has an inner drawer for cutlery and utensils.

Fully extendable with soft-close.
Frame height 510 mm
Frame depth: 470 mm

Waste bins (litre):
1 pc 17 litre, 1 pc 11 litre, 1 pc 8 litre,
1 pc 5 litre

Frame in white melamine.
White-lacquered door (NCS 0500-N)

761-060-01

**Hanging cabinet under sink, 60 cm**

The cabinet is fitted with 4 waste bins.

Fully extendable with soft-close.
Frame height 510 mm
Frame depth: 470 mm

Waste bins (litre):
1 pc 17 litre, 1 pc 11 litre, 1 pc 8 litre,
1 pc 5 litre

Frame in white melamine.
White-lacquered door (NCS 0500-N)

762-060-01

**Hanging cabinet under sink, 80 cm**

The cabinet is fitted with 6 waste bins.

Fully extendable with soft-close.
Frame height 510 mm
Frame depth: 470 mm

Waste bins (litre):
1 pc 17 litre, 1 pc 11 litre, 2 pcs 8 litre,
2 pcs 5 litre

Frame in white melamine.
White-lacquered door (NCS 0500-N)

762-080-01

**Fittings for hanging cabinet**

One set per cabinet.

6250-001

**Mini cabinet on wheels with drawer and inner drawer, fully extendable with soft-close**

The cabinet is opened by pulling out the drawer.

Width: 400 mm
Height: 574 mm
Depth incl. grip handle: 495 mm

Top board in white compact laminate with integrated grip handle.

Frame in white melamine.
White-lacquered door (NCS 0500-N)

770-040-01

**Mini cabinet on wheels with waste sorting and inner drawer, fully extendable with soft-close**

The cabinet is opened by pulling out the drawer. The bottom with the waste bins is included.


Included bins:
1 pc 11 liter 1 pc 17 liter

Width: 400 mm
Height: 574 mm
Depth incl. grip handle: 495 mm

Top board in white compact laminate with integrated grip handle.




Frame in white melamine.
White-lacquered door (NCS 0500-N)

771-040-01

**Cutlery compartment for inner drawer**

Practical compartments that can be adapted to suit your needs.

Fits 30.0 cm wide inner drawer	460-030
Fits 40.0 cm wide inner drawer	460-040
Fits 50.0 cm wide inner drawer	460-050
Fits 60.0 cm wide inner drawer	460-060
Fits 70.0 cm wide inner drawer	460-070
Fits 80.0 cm wide inner drawer	460-080

	Front that conceals the lift frame Total length: Width of lift -94 mm <i>Replace xxx with cm when ordering. For example, 385H-040-01 for 40.0 cm</i> Height: 103 mm <table><tr><td>Lacquered aluminium, white RAL 9003</td><td>385H-xxx-01</td></tr><tr><td>Lacquered ALU, Anthracite RAL 9004</td><td>385H-xxx-07</td></tr><tr><td>Lacquered ALU, Black RAL 9004</td><td>385H-xxx-10</td></tr><tr><td>Anodised ALU</td><td>385H-xxx-06</td></tr></table>	Lacquered aluminium, white RAL 9003	385H-xxx-01	Lacquered ALU, Anthracite RAL 9004	385H-xxx-07	Lacquered ALU, Black RAL 9004	385H-xxx-10	Anodised ALU	385H-xxx-06					
Lacquered aluminium, white RAL 9003	385H-xxx-01													
Lacquered ALU, Anthracite RAL 9004	385H-xxx-07													
Lacquered ALU, Black RAL 9004	385H-xxx-10													
Anodised ALU	385H-xxx-06													
	Safety plates Sidelift 6400 The function of the safety plate is to stop the movement of the cabinet if the plate comes in contact with any object. Choose a plate that suits the width of the cabinet. Colour: White Thickness: 12 mm Depth: 466 mm <table><tr><td>30.0 cm width</td><td>6253-030-01</td></tr><tr><td>40.0 cm width</td><td>6253-040-01</td></tr><tr><td>50.0 cm width</td><td>6253-050-01</td></tr><tr><td>60.0 cm width</td><td>6253-060-01</td></tr><tr><td>70.0 cm width</td><td>6253-070-01</td></tr><tr><td>80.0 cm width</td><td>6253-080-01</td></tr></table>	30.0 cm width	6253-030-01	40.0 cm width	6253-040-01	50.0 cm width	6253-050-01	60.0 cm width	6253-060-01	70.0 cm width	6253-070-01	80.0 cm width	6253-080-01	
30.0 cm width	6253-030-01													
40.0 cm width	6253-040-01													
50.0 cm width	6253-050-01													
60.0 cm width	6253-060-01													
70.0 cm width	6253-070-01													
80.0 cm width	6253-080-01													
	Safety package for safety plate of your own design The safety package contains micro-switches and cables for mounting on your own board. Instructions with milling dimensions enclosed. <i>The dimensions of the board must be: Thickness: 12-16 mm Width: 400 - 800 mm Depth: 466 mm</i> <table><tr><td></td><td>6253-00</td></tr></table>		6253-00											
	6253-00													
	Radio control - Hand control Dimensions: 38 x 110 x 10 mm <table><tr><td>For one lift</td><td>61385</td></tr></table>	For one lift	61385											
For one lift	61385													
	Cover panels Used to cover installations under the worktop. 12 mm white melamine 2 pcs height 438 mm 2 panels are needed for lifts longer than 2490 mm <table><tr><td></td><td>6262-240-01</td></tr></table>		6262-240-01											
	6262-240-01													
	Rear edge trim in aluminium for top board Mounted behind the top board. Brushed aluminium Height above top board: 20 mm Thickness behind top board: 3 mm (per metre) <table><tr><td></td><td>6943-06</td></tr></table>		6943-06											
	6943-06													
	Height-adjustment kit Used to change stroke after installation. <i>Contains programming box and memory adapter.</i> <table><tr><td></td><td>61400</td></tr></table>		61400											
	61400													